


Filling level indication ltr./US.liq.gal

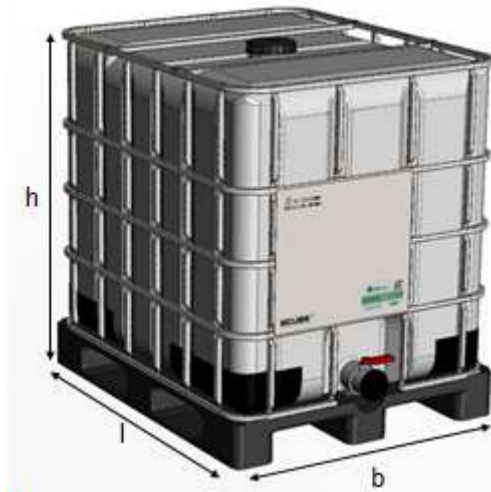

Greif code IBIB00257GQB0001

customer Tholu b.v.

customer article #

External dimensions targets (mm):

length (l)	width (b)	height (h)
1200	1000	1171

Weight (kg) 59 +/- 3 %

brimful volume (ca ltr.) 1060

Eligible for Zone area 2 Food compliance FDA

Materials and Structural Equipment

Cage tubular steel 18x18mm, galvanized, welded

Pallet plastic skid pallet, injection molded

Inner receptacle blowmolded **Resin** HDPE UV stab.

Weight 15,5+0,5 kg **Color** nature colored

Openings and closures

Top closure Screw cap from PE-HD black DN150 for automatic filling

Cap gasket sponge rubber (EPDM) venting /

2" closure **Plug washer** n.a.

Torques cap/plug ca

Discharge Opening DN50 **Valve** ball valve, PE-HD black, complete **color handle** blue

Flange gasket EPDM **Flap seal** EPDM

connection S60x6 **outlet nozzle**

Label plates
 Front 470x530
 Left
 Right
 Back 300x520

UN approval

UN31HA1/Y/./NL/TCPI-****-150582/4066/2023..GEF*

max. stacking load (kg): resting 4066 Transport 2258

stickers Earthminded Collection, TARA 60 kg

All components with product contact are free of recycled polymers.

Remarks

Date of creation 14.07.2017

Author Stabrey, Robert

Statu released

Previous version

+49 2234 7015248

robert.stabrey@greif.com